


Post-event load review

Far West load FWT Load 114 - evening peak, 2026-09-21

Load and voltage, 15-minute averages

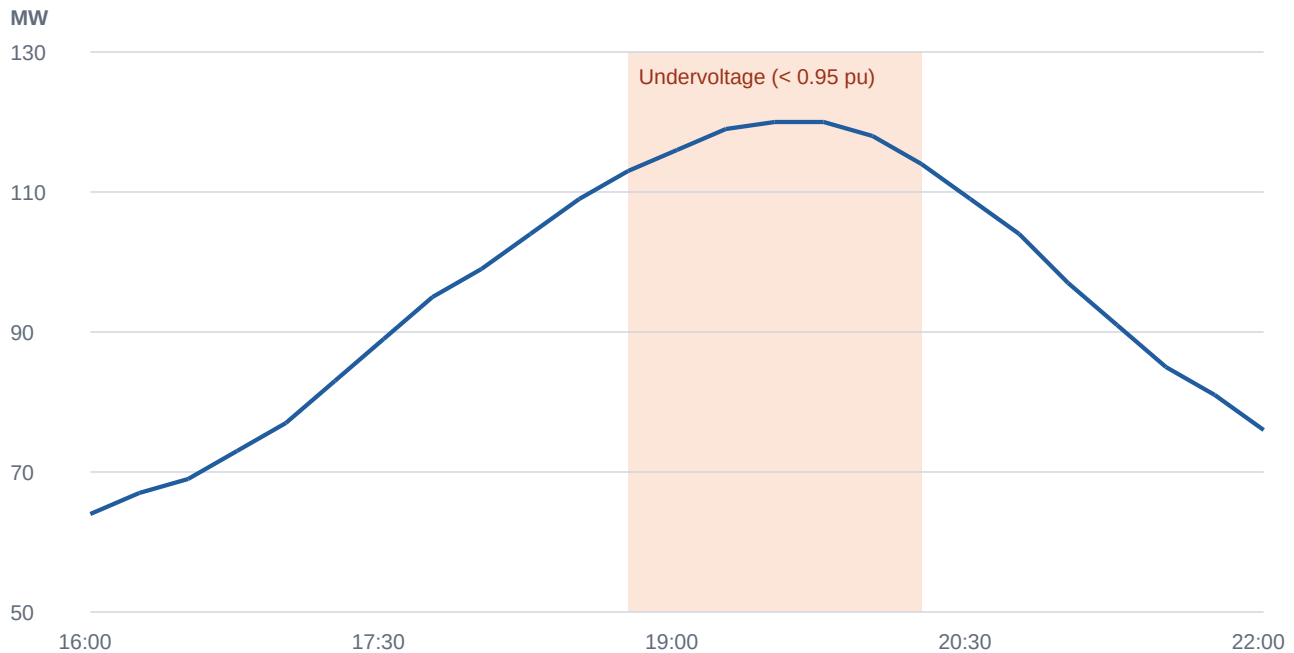

Findings

Load peaked at 120 MW at 19:30, 69 % of the 173 MW rating.

Voltage stayed below 0.95 pu for 90 minutes; the lowest reading was 0.93 pu.

The capacitor bank at the serving substation was out of service for maintenance.

Recommended: return the capacitor bank before the next peak, and review the voltage schedule for the Far West zone.